

# MOTORIZED ROLLER CONVEYOR WORKSHEET

Company \_\_\_\_\_ Date \_\_\_\_\_  
 Contact \_\_\_\_\_ Quote Due \_\_\_\_\_ Desired Delivery \_\_\_\_\_  
 Phone No. \_\_\_\_\_ Contact Email \_\_\_\_\_ State \_\_\_\_\_  
 NorthAmCon, Inc. Sales Contact \_\_\_\_\_ Quote #: \_\_\_\_\_  
 Quantity \_\_\_\_\_

### Product Specs:

Max:  
 - Width (inches): \_\_\_\_\_ Length (inches): \_\_\_\_\_  
 - Height (inches): \_\_\_\_\_ Weight (lbs): \_\_\_\_\_  
 Min:  
 - Width (inches): \_\_\_\_\_ Length (inches): \_\_\_\_\_  
 - Height (inches): \_\_\_\_\_ Weight (lbs): \_\_\_\_\_  
 Description: \_\_\_\_\_  
 Max. Qty.: \_\_\_\_\_ Total Live Load: \_\_\_\_\_  
 Temperature  
 -Environment: \_\_\_\_\_  
 -Product: \_\_\_\_\_

### Conveyor Construction:

Between Frame (BF) \_\_\_\_\_  
 Roller C/C \_\_\_\_\_  
 Roller Height:  1/4" high  1-3/4" low  
 Straight Length: \_\_\_\_\_  
 Curve - Degree: \_\_\_\_\_  
 Inside Radius (I.R.): \_\_\_\_\_  
 Bolt-Together  
 Galvanized  Powder Coat  
 Color/RAL: \_\_\_\_\_  
 Welded  
 Powder Coat  
 Gloss Black  
 Color/RAL: \_\_\_\_\_

### Power Supply

#### Plant Voltage:

110V Single Phase  460V Three Phase  
 220V Single Phase  
 Speed:  
 Fixed \_\_\_\_\_ FPM  
 Variable \_\_\_\_\_ to \_\_\_\_\_ FPM

### Drive Method:

High Tension Urethane Bands (<100 lb capacity)  
 Poly-Ribbed Belt  
 40 Series Chain

### Roller Specs:

2.5" OD x 11 Ga Mild Steel  
 1.9" OD x 16 Ga Galv.  
 Other: \_\_\_\_\_  
 Urethane Sleeves: \_\_\_\_\_

### Support Type:

Legs  Ceiling Supports TOR \_\_\_\_\_ +/- \_\_\_\_\_


### Side Guides:

One Side  Both Sides

End Stop: Height \_\_\_\_\_ Qty: \_\_\_\_\_

### Application Type:

Transportation  
 Zero Pressure - Zone Length \_\_\_\_\_

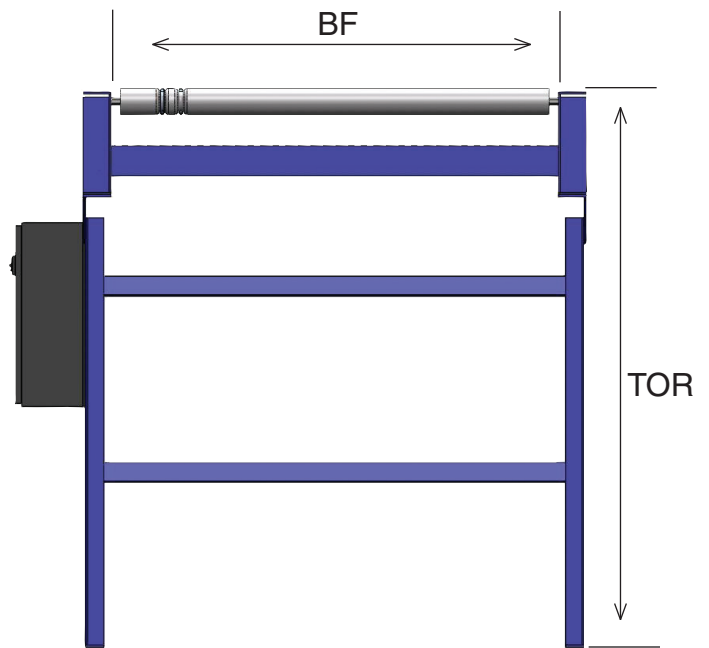

Notes: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Approval Drawing Required:  Yes  No