
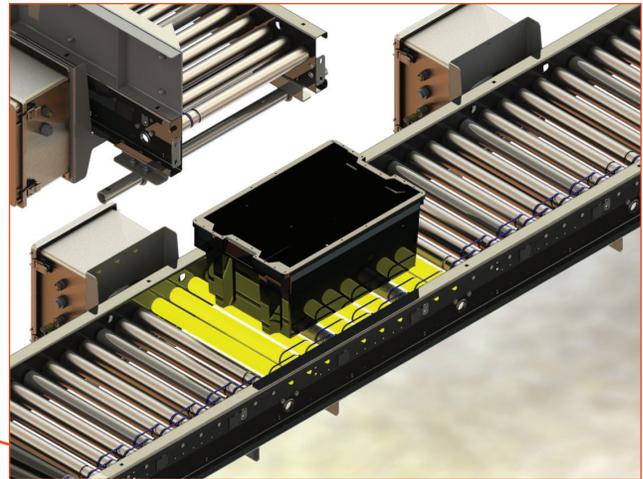


Nor+ STAINLESS

24VDC CONVEYOR - STAINLESS STEEL	
Specification	Standard Values
Zone Capacity - O-Ring	75 lbs
Zone Capacity - Poly-V	300 lbs
Length	30", 60", & 120"
Between Frames (BF)	13" - 39"
Zone Length	15" & 30"
Speed FPM	30 - 380 (typical range)
Roller Size	1.9"
Roller Centers	3"
Overall Frame Width	17" - 43"
Height (TOR)	12" - 57"
Frame Size	7" x 2" x 12 ga.
Power Supply	Single & 3-Phase
Standard Color	304 Mill Finish Stainless
Weight Per 10' Conveyor	360 lbs for 22" BF

Ask how easy it is to customize!

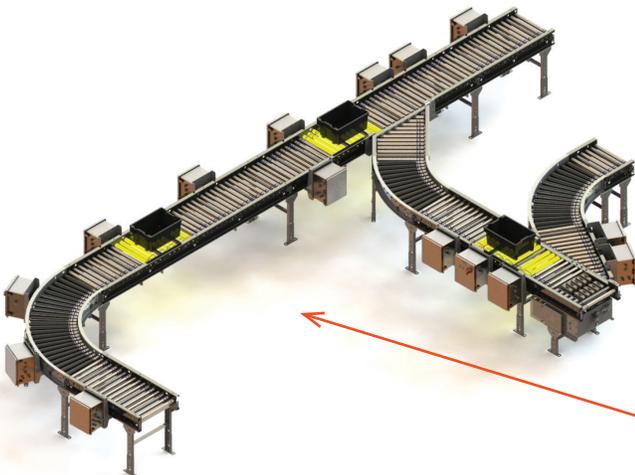

NorthAmCon's 24VDC Nor+ Stainless is a great example of our ability to customize standard conveyors using stainless-steel componentry. The use of stainless-steel components enhances durability, washdown capable, corrosion resistance, and allows for easy cleaning. Nor+ Stainless solutions combine the benefits of stainless-steel with energy-efficient DC technology to support your sustainability initiatives.


Nor+ STAINLESS

24VDC CONVEYOR - STAINLESS-STEEL

Stainless-Steel Components

- Belt-Over-Roller
- Curve
- Gates - Lift and Swing
- Gravity
- Helical
- Herringbone
- Incline/Decline
- Lift and Rotate
- Merge
- Mountable Conveyor Deck
- Multi-Tier
- Overhead Conveyor
- Product Positioning
- Spare Parts
- Split Lane
- Straight
- Supports
- Transfer
- Troughed
- Turn Table

See literature for additional specifications. Some options may not be listed above. Please contact sales for your stainless steel application.

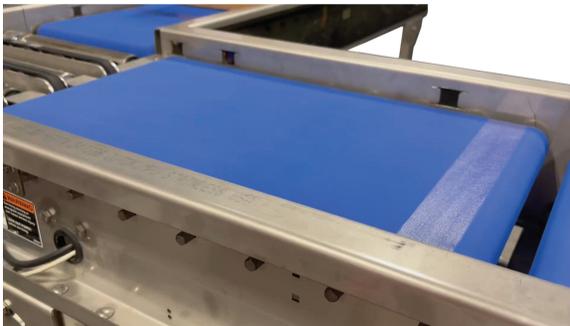

BELT-OVER-ROLLER



SUPPORTS