


Nor+ LIFT AND ROTATE

24VDC CONVEYOR - LIFT AND ROTATE	
Specification	Standard Values
Lift Capacity	Up to 150 lbs
Lift Type	Electric Standard, Pneumatic Available
Rotation Type	Electric Standard, Pneumatic Available
Degrees of Rotation	90°, 180°, 270°, & 360°
Between Frames (BF)	20" - 39"
Zone Length	30" - 60"
Cycle Rate	1-5 cycles per minute max
Roller Size	1.9"
Overall Frame Width	17" - 43"
Height (TOR)	18" - 57"
Frame Size	7" x 2" x 12 ga.
Power Supply	Single & 3-Phase

Ask how easy it is to customize!

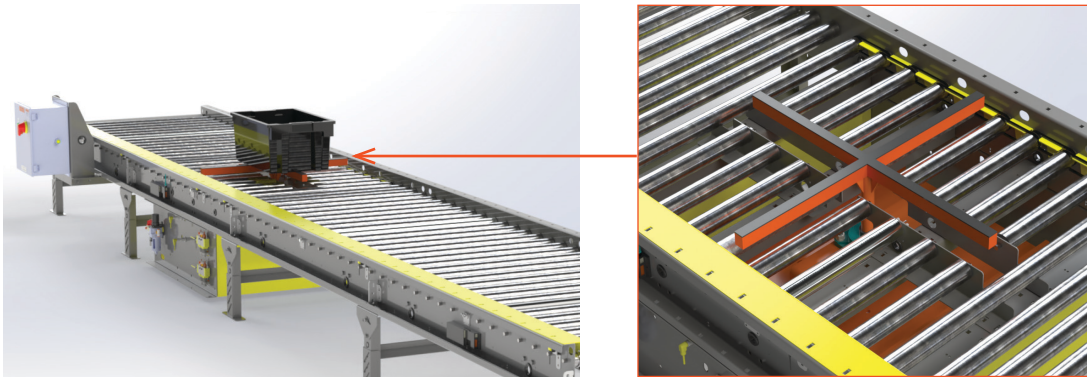

NorthAmCon's Nor+ Lift and Rotate device is engineered to reorient products in 90° increments for precise downstream processing such as banding, sorting, scanning or labeling. Ideal for applications requiring consistent product presentation, this unit gently lifts items off the rollers and rotates them to the desired angle before placement back on the line. It's a compact automated solution compared to traditional orientation devices. The Nor+ Lift and Rotate unit supports efficient, repeatable product orientation for multi-directional material handling environments.