


# Nor+ STAINLESS

24VDC CONVEYOR - STAINLESS-STEEL	
Specification	Standard Values
Zone Capacity - O-Ring	75 lbs
Zone Capacity - Poly-V	300 lbs
Length	30", 60", & 120"
Between Frames (BF)	15" - 39"
Zone Length	15" & 30"
IP Rating*	IP65
Speed FPM	30 - 380 (typical range)
Roller Size	1.9"
Roller Centers	3"
Overall Frame Width	19" - 43"
Height (TOR)	12" - 57"
Frame Size	7" x 2" x 12 ga.
Power Supply	Single & 3-Phase
Conveyor Material	304 Stainless 2B Mill Finish

\*Higher ratings available upon request.

**Ask how easy it is to customize!**

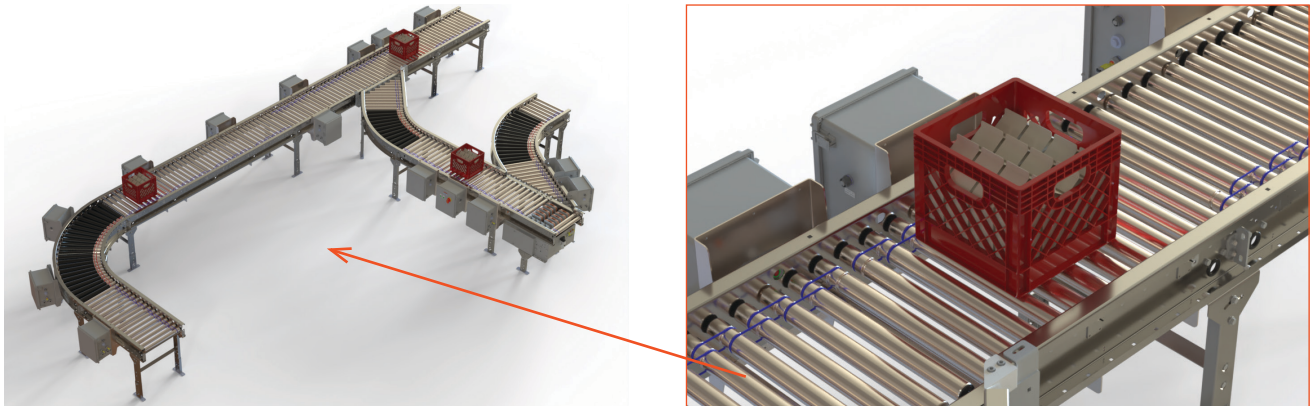

NorthAmCon's 24VDC Nor+ Stainless is a great example of our ability to customize standard conveyors using stainless-steel componentry. The entire Nor+ conveyor line can be adapted to meet specific application needs. Stainless-steel offers washdown compatibility and strong corrosion resistance, making it well-suited for packaged foods, parts washing, and similar uses. Nor+ Stainless solutions combine the versatility of stainless-steel with DC powered technology to efficiently handle the most demanding environments.

# Nor+ STAINLESS

## STAINLESS-STEEL COMPONENTS

- Belt-Over-Roller
- Bump Turn
- Curve
- Filler Plates
- Gates - Lift and Swing
- Gravity
- Helical
- Herringbone
- Incline/Decline
- Lift and Rotate
- Merge
- Mountable Conveyor Deck
- Multi-Tier
- Overhead Conveyor
- Product Positioning
- Spare Parts
- Split Lane
- Straight
- Supports
- Transfer
- Troughed
- Turn Table

Please contact sales for your stainless-steel application.

