


Nor+ HD LOAD/UNLOAD

24VDC CONVEYOR - HEAVY DUTY	
Specification	Standard Values
Zone Capacity - Poly-V	Up to 2,000 lbs
Zone Capacity - Chain	Up to 3,000 lbs
Length	60" & 120"
Effective Width (EW)	15" - 67"
Zone Length	30" & 60"
Speed FPM	10 - 60 (typical range)
Roller Size	2.5"
Roller Centers	3", 4" & 6"
Overall Frame Width	21" - 75"
Height (TOR)	12" - 30"
Frame Size	8" x 2" x 10 ga.
Power Supply	Single & 3-Phase
Standard Color	Dusty Gray - RAL 7037

Ask how easy it is to customize!

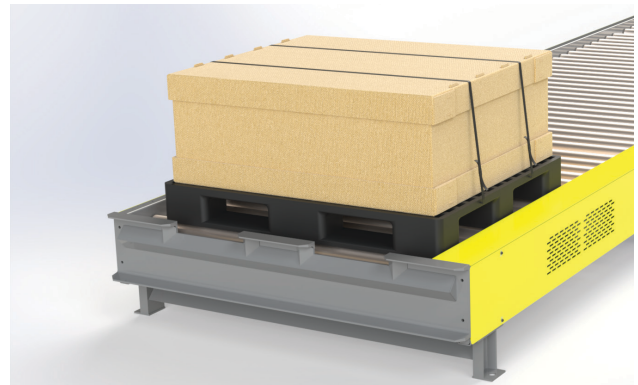

NorthAmCon's Nor+ HD Load/Unload is specifically designed for high-impact environments. Robust fork deflectors shield critical components from accidental impact from fork trucks in load and unload areas. This improves durability, reduces maintenance downtime, and supports safer, more efficient loading and unloading processes throughout the conveyor system. Nor+ HD Load/Unload easily integrates with other Nor+ HD equipment.